
GREEN RIVER

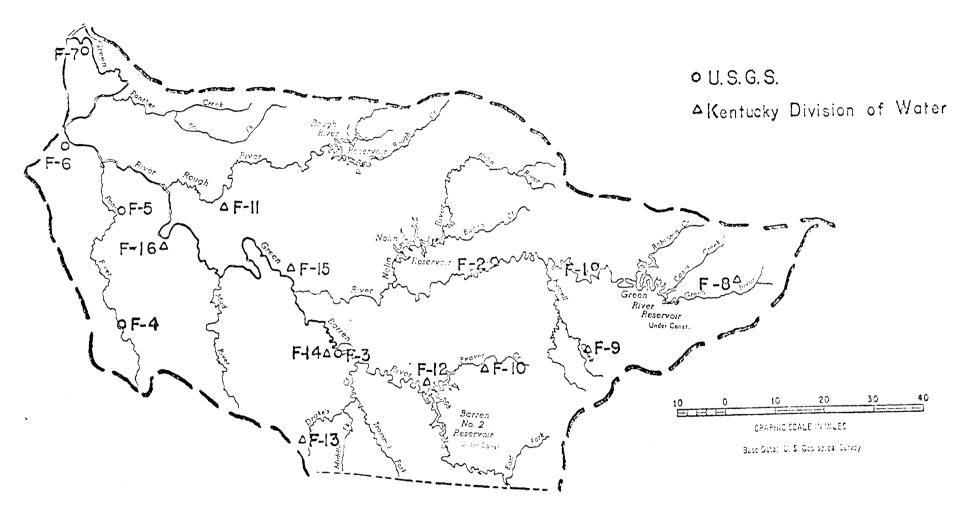

THE GREEN RIVER BASIN

The Green River Basin is located in West Central Kentucky and Northern Tennessee. The first section of this report will deal with the general description of the area. The second section will enter into an analysis of the water quality in the basin, its causes and effects. The third section of the report summarizes the water quality of the basin and the correction needs.

I. A Description of the Green River Basin

A. Geography

The Green River Basin is located in West-Central Kentucky and in Northern Tennessee. It comprises a total drainage area of 9,229 sq. mi., with 8,821 in Kentucky and 408 in Tennessee. The Green River Basin encompasses all or portions of 31 counties in Kentucky and 3 in Tennessee. (The Kentucky County Areas are listed in Table F-1 of the Appendix). The Green River is a tributary of the Ohio River, the confluence of the Green River with the Ohio River is 197 miles above the mouth of the Ohio River. The main tributaries of the Green River are the Barren, Nolin, Pond and Rough Rivers. These and other sub-basins with drainage basin areas over 200 sq. mi. are listed in Table F-2 in the Appendix.

B. Topography

The primary interest is in the character and slopes of the land and the streams within the basin as they affect water quality. The slope of the land is one of the variables which contributes to water quality. The character indicates the type of land over which the runoff travels before entering the stream. The largest portion of the Green River Basin is in the physiographic region known as the Mississippian Plateau which can be characterized as gently rolling fields, rocky hillsides, and Karst topography. Karst topography has

many sinkholes, underground solution channels and caves. Some wastewater treatment plants and storm water runoff are discharged in the underground formations since the region is without surface streams. The second largest physiographic region is the Western Kentucky Coal Fields with somewhat higher elevations and generally more rugged than the Mississippian Plateau Region. The Mississippian Plateau Region has a lower quantity of runoff and higher runoff quality than the Western Kentucky Coal Field Region.

The quality of the water in a stream can be influenced by the slope of the stream. This effect is demonstrated in the direct relationship between the slope and the capacity of the stream to assimilate waste loads through reaeration. A stream slope of 2 ft./mi. or less produces a low rate of reaeration. A stream slope between 2 and 6 ft./mi. produces a moderate rate of reaeration. Slopes between 6 and 10 ft./mi. produces a high rate of reaeration. The main stem of the Green River flows into the Ohio River at elevation 338 feet above mean sea level (m.s.l.) and is controlled by a series of six locks and dams for navigational purposes. These structures with mile points and pool lengths are listed in Table F-3. Past these structures the river then rises at a gradual slope of 1.6 ft./mi. to the Green River Reservoir at elevation 600 feet above m.s.l. The tributary slopes range from 0.8 ft./mi. to 3 ft./mi. in the lower reaches and 4.7 ft./mi. to 7.7 ft./mi. in the upper regions and the highest elevation is 1,040 feet above m.s.l. A complete list of slopes is included in Table F-2 of the Appendix.

C. Geology

Surface water quality in the Green River Basin is affected by the parent bedrock, mineral resources and groundwater. The base parent material for most of the Green River Basin is limestone bedrock which produces a bicarbonate type hardness in the water. The Pond River and Rough River sub-basins have sandstone and shale rock layers which produce a sulfate type hardness in the water.

The major mineral resources of the Green River Basin are coal, oil and gas with coal being the largest resource. Generally, coal production in this basin increases acidity and mineralization in the stream. Approximately 40 million tons of coal was produced in the basin in 1972, 94% of which was mined in 3 counties, Muhlenberg (65%), Ohio (16%) and Hopkins (13%). These and other county coal productions are listed in Table F-4 of the Appendix. Approximately 75% of the basin's production in 1972 was done by strip mining on 12.5 sq. mi. A "Soil Conservation Service" basin study indicates about 264 sq. mi. of strip mineable coal still exists. The Green River Basin contributed one-third of the total coal production in 1972, and it has been estimated that coal production in Kentucky by 1985 will reach 400 million tons per year, 3 1/3 times the 1972 figure. A copy of the Commonwealth of Kentucky strip mining slope regulations is included in Table F-5 of the Appendix.

Other mineral resources in the Green River Basin are oil and gas. Oil wells in Kentucky can produce a brine as a waste product. Disposal of brine water other than by reinjection could degrade water quality. In the Green River Basin oil and gas production are not expected to increase in the future.

An important groundwater effect on water quality is the increase in assimilative capacity of the stream due to the substantial amounts contributed to the base flow by springs in the Mississippian Plateau during period of low flow.

Groundwater yields in the Green River Basin range from 50 gallons per minute (g.p.m.) or less in 75 percent of the basin; 50-500 g.p.m. in approximately 24 percent of the basin, and 500 to 1,000 g.p.m. in approximately 1 percent of the basin. A map of these regions is included in the Appendix.

1). Hydrology

The stream flow of the Green River Basin was obtained at six stations:

(1) Nolin River at Kyrock, (2) Barren River at Bowling Green, (3) Rough River at the Falls of the Rough River, on the main stem of the Green River at

(4) Munfordsville, (5) Lock Number 4 and (6) Lock Number 2. The low flows at all of these stations were augmented by Corps of Engineer Reservoirs. The low flow period for once in 10 years for 7-days is adjusted to include flow augmentation provided by the impoundments. The yields without augmentation are low and a large drainage basin area is needed before a flow occurs. In the Barren River Basin 100 sq. mi. of drainage area will be needed for 2 cubic feet per second/ square mile (c.f.s./sq.mi.) of low flow. Because of this flow condition water quality becomes increasingly difficult to maintain during periods of low flow.

The Karst topography (see Topography) has an influence on the hydrology of the Green River Basin. The sinkholes and underground solution channels store the runoff water during periods of high flows, and discharge this stored water through springs after the peak flow in the stream system has passed.

In addition to the streams mentioned there are 13 major lakes located within the basin, (Table F-7 of the Appendix). Nine of these are multiple purpose structures, two slurry dams for Peabody Coal Company, one flood retardent structure and one for recreation purposes. There are 4 Corps of Engineers Reservoirs with a total area of 29,090 acres at seasonal pool with a total volume of 532,000 acre feet. They are the Nolin River, Green River, Barren River, and Rough River reservoirs. They are all designed and operated for flood centrol, recreation, low flow augmentation and fish and wildlife purposes, and in addition the Green, Barren and Rough River Reservoirs have volume allocated for water supply. Lakes impounded by the U.S.D.A. Soil Conservation Service

and others have 32,200 acre feet of volume. These lakes were not designed with the capability for low flow augmentation.

E. Population

The total population in the basin is 426,000 which is distributed uniformly except for major population centers located in Warren (Bowling Green; 36,400), Hardin (Elizabethtown; 11,700), Barren (Glasgow; 11,300), Hopkins (Madisonville; 15,300), and Muhlenberg (Greenville-Central City; 9,330) counties. Of these major cities Madisonville, Elizabethtown and Glasgow discharge to zero flow streams and have a measurable impact on water quality. Populations of the other basin counties are listed in Table F-8 of the Appendix with the municipalities listed in Table F-9 of the Appendix. The basin population is 35 percent urban and 65 percent rural.

TABLE F-13
SURFACE WATER RECORDS FOR THE GREEN RIVER BASIN

STATION	PERIOD OF RECORD	DRAINAGE AREA	AVERAGE FLOW	MAXIMUM FLOW	MINIMUM FLOW	7-day/10-yr. LOW FLOW
Nolin River at Kyrock	1 28 yr.	703 sq.mi.	892 cfs, <u>l.3cfs</u> * sq.mi.	22,700 cfs, <u>32cfs</u> sq.mi.	0 cfs	50 cfs
	wtr/yr 1976		1,017 cfs, <u>l.4cfs</u> sq.mi.	6,790 cfs, <u>10cfs</u> sq.mi.	0 cfs	
Barren River at Bowling Green		1,848 sq.mi.	2,540 cfs, <u>1.4cfs</u> sq.mi.	85,000 cfs, 46cfs sq.mi.	44 cfs, <u>0.0cfs</u> sq.mi.	116 cfs
	wtr/yr 1976		3,284 cfs, <u>l.8cfs</u> sq.mi.	22,500 cfs, <u>12cfs</u> sq.mi.	205 cfs, <u>0.1cfs</u> sq.mi.	
Rough River at Falls of Rough	3 28 yr.	504 sq.mi.	741 cfs, <u>1.5cfs</u> sq.mi.	12,400 cfs, <u>25cfs</u> sq.mi.	6 cfs, <u>0.0cfs</u> sq.mi.	50 cfs
	wtr/yr 1976		809 cfs, <u>l.6cfs</u> sq.mi.	3,080 cfs, <u>6cfs</u> sq.mi.	69 cfs, <u>0.1cfs</u> sq.mi.	
Green River at Munfordville	4 50 yr.	1,673 sq.mi.	2,659 cfs, <u>l.6cfs</u> sq.mi.	76,800 cfs, <u>46cfs</u> sq.mi.	39 cfs, <u>0.0cfs</u> sq.mi.	152.4 cfs
	wtr/yr 1976		3,184 cfs, <u>1.9cfs</u> sq.mi.	21,500 cfs, <u>13cfs</u> sq.mi.	297 cfs, <u>0.2cfs</u> sq.mi.	
Lock No. 4 at Woodbury	5 39 yr.	5,403 sq.mi.	8,122 cfs, <u>1.5cfs</u> sq.mi.	205,000 cfs, <u>38cfs</u> sq.mi.	200 cfs, <u>0.0cfs</u> sq.mi.	319.9 cfs
	wtr/yr 1976		10,090 cfs, <u>1.9cfs</u> sq.mi.	49,500 cfs, <u>9 cfs</u> sq.mi.	1,020 cfs, <u>0.2cfs</u> sq.mi.	

Table F-13 Continued

STATION	PERIOD OF RECORD	DRAINAGE AREA	AVERAGE FLOW	MAXIMUM FLOW	MINIMUM FLOW	7-day/10-yr. LOW FLOW
Lock No. 2 at Calhoun	6 46 yr.	7,564 sq.mi.	10,960 cfs, <u>1.4cfs</u> sq.mi.	208,000 cfs, <u>27cfs</u> sq.mi.	280 cfs, <u>0.0cfs</u> sq.mi.	319.9 cfs
	wtr/yr 1976		12,760 cfs, <u>1.7cfs</u> sq.mi.	46,300 cfs, $\frac{6cfs}{sq.mi}$.	1,180 cfs, <u>0.2cfs</u> sq.mi.	

* Cubic feet per second

- 1. Flow regulated since March, 1963 by Nolin Lake.
- 2. Flow regulated since March, 1964 by Barren River Lake.
- 3. Flow regulated since October, 1959 by Rough River Lake.
- 4. Flow regulated since February, 1969 by Green River Lake
- 5. Flow regulated by upstream lakes on Green, Barren, and Nolin River.
- 6. Flow regulated by upstream lakes on Green, Barren, Nolin, and Rough River.

NOTE: Data is taken from "Surface Water Records in Kentucky" by the United States Geological Survey. The 7-day/10-yr. low flow was taken from the waste load allocation produced as a component of the 303e River Basin Continuing Planning Process.

II. Basin Water Quality

A. Description of Sampling Stations

The recorded water quality of the basin is presented along with some of the major causes and effects. Also presented are the major uses of surface water in the basin description of the water sampling stations.

There were four stations used in this report to describe the typical water quality within the basin. The first station is on the main stem of the Green River at Munfordville covering 1,673 square miles (sq. mi.) or 18% of the Green River Basin. The second station is located at Bowling Green covering 1,848 sq. mi. or 82% of the Barren River Sub-basin. The third station is on the Green River approximately mid-river at Central City with 6,300 sq. mi. or 68% of the basin area above the station. The fourth station is on the main stem of the Green River near its mouth at Lock No. 1 covering 9,181 sq. mi. or 99° of the basin.

The Pond River near Sacramento was chosen to describe the effect of coal production on water quality in the Green River Basin. This station is located in the heart of the coal production of Western Kentucky. There is also limited oil production in this area. The drainage area above the station is 523 sq.mi. or 65% of the Pond River Sub-basin. The following discussion of parameters is based upon the data included in Table F-10 of the Appendix.

B. General Chemical Water Quality

The chemical composition of water is best defined by grouping dissolved elements which compose the total dissolved solids. By examining the relationships of groups of chemicals, the type of water whether hard or soft, salty, acid or high in sulfates reflects the mix of surface and groundwater. The chemical characteristics of a stream when viewed over a long period of time

is primarily from surface water. The type of rock formation and soils which the surface water contacts causes this predominate chemical characteristic. The contribution of groundwater, which is generally higher in dissolved solids than surface water, can be shown by selecting the low flow period for data analyses. The general character of waters in Kentucky is one of moderate hardness caused by calcium and magnesium salts. The influence of mining activities is clearly indicated when the sulfate content increases to a higher level than the bicarbonate content, and the pH is on the acid side, below 5.5.

Oil field operations, when brine is encountered, are reflected by changes in sodium and chloride contents of the water. For Kentucky water, the influence is pronounced when either chloride or sodium exceeds 20 - 25 parts per million as an average value.

The four reporting stations for general water quality reflect different situations on the river.

The Munfordville Station is near the headwaters but below the Green River Reservoir with 18% of the drainage area of the basin. This station has wide fluctuations between average and maximum value (Figure F-5). This station shows water quality in excess of those for Kentucky water particularly the high levels of sodium-(potassium) and chlorides. This can be attributed to an oil boom in Green and Taylor Counties which produced 10 million barrels in 1959. However, the graph for last year's data (Figure F-4) indicates these levels have decreased to pre-oil field conditions due to the decrease in oil production and an increase in control measures.

The station on the Barren River at Bowling Green has approximately the same size drainage basin area as the station at Munfordville but the station at Bowling Green shows a stable water quality which is attributed to the Barren

River Reservoir. The graph (Figure F-2) indicates that the natural water quality of the Barren River Basin is a bicarbonate type water with most mineralization (dissolved solids) in the form of calcium bicarbonate.

The Pond River at Sacramento was chosen to depict the influence of coal production on a small drainage basin. Every parameter except bicarbonate (Figure F-7) is high in the Pond River which demonstrates the effect of acid mine drainage on water quality. Bicarbonate is a measure of a stream's capacity to neutralize acids. Bicarbonate has been depleted by acid mine drainage and this effect is shown by an average pH value of 4.9 with a minimum value of 2.8. To meet the energy crisis coal production is expected to increase over three times the present rate in Kentucky. The effects of coal mining on the Pond River water quality emphasized the influence that a marked increase in coal mining in the Green River Basin can produce on the basin water quality.

The effect of energy related resource development is indicated by comparison (Figure F-8) of the Green River Station at Beech Grove (covering 99% of the basin) with the Barren River Station (Figure F-2). The decrease in dominance of the bicarbonate hardness over the sulfate hardness clearly illustrates the increasing influence of coal production on the Green River Basin.

The relatively high levels of sodium-(potassium) and chlorides reflect the past influence of the oil production throughout the basin.

At this time, the chemical water quality in the Green River Basin is good, but the demand for coal could have disasterous and long lasting effects on the water quality in the portions of the Green River Basin downstream from these developments. The influence of coal production is long lasting because there is no effective means, known at this time, of treating or eliminating acid mine drainage on a large scale.

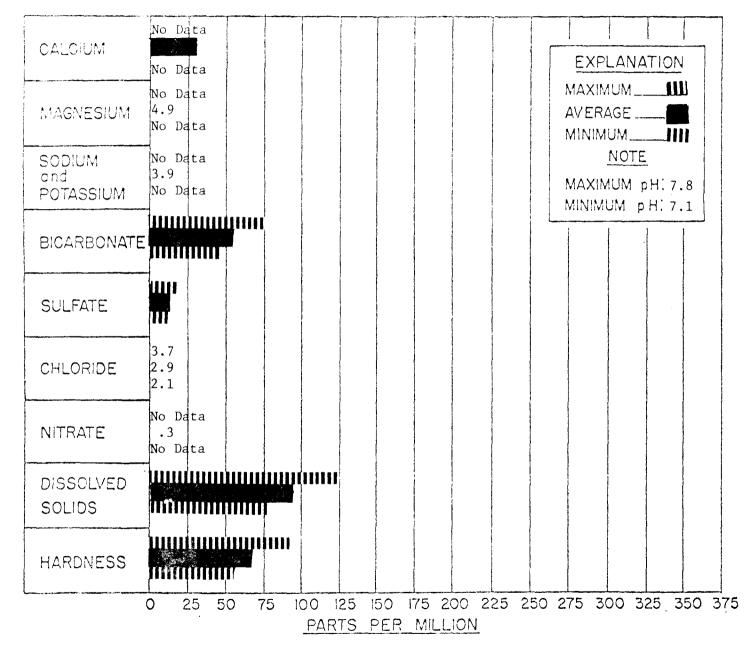


FIGURE F-1
Green River
Greensburg
3-70 to 8-72



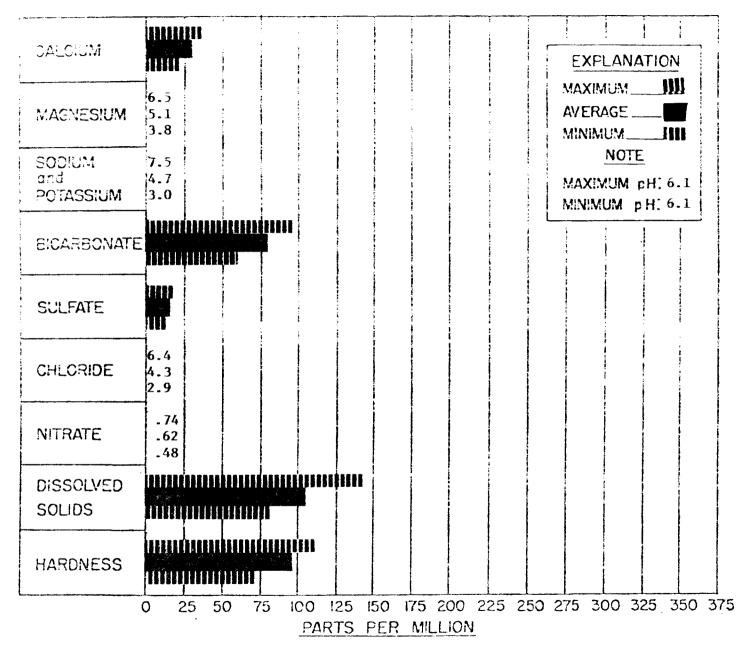



FIGURE F-2

Barren River

Bowling Green

4-75 to 11-75

MAXIMUM, AVERAGE, and MINIMUM concentrations of dissolved constituents

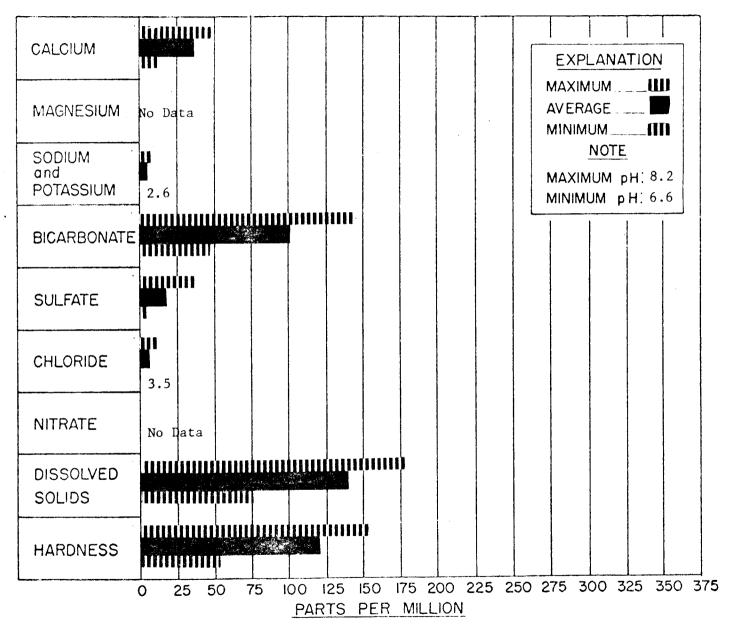


MAXIMUM, AVERAGE, and MINIMUM concentrations of dissolved constituents,

FIGURE F-3


Barren River

Bowling Green

10-59 to 4-74

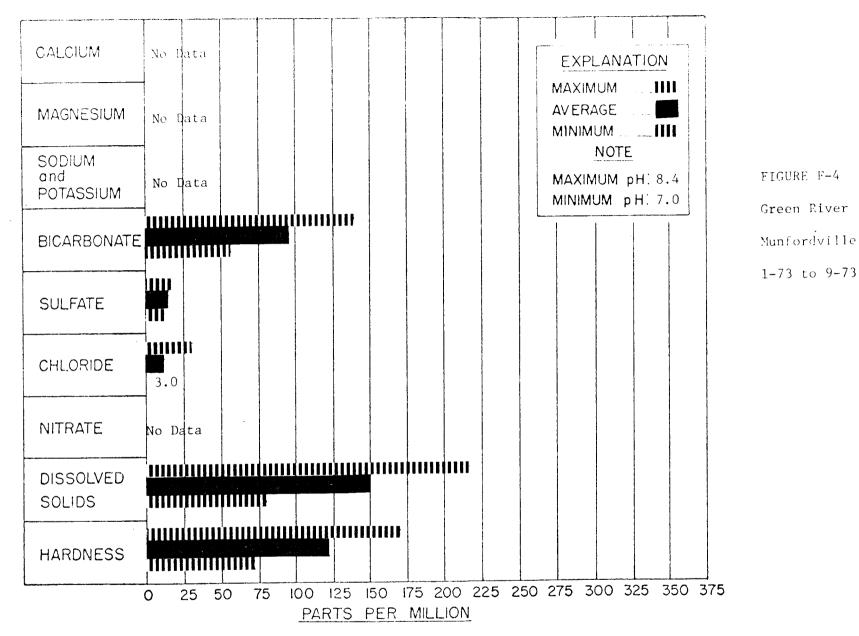

MAXIMUM, AVERAGE, and MINIMUM concentrations of dissolved constituents,

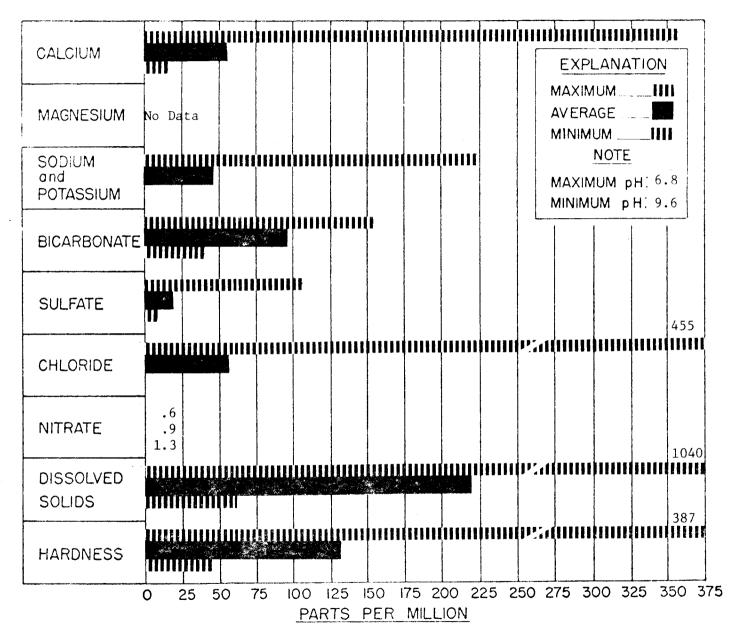

MAXIMUM, AVERAGE, and MINIMUM concentrations of dissolved constituents,

FIGURE F-5

Green River

Munfordville

1-61 to 9-73



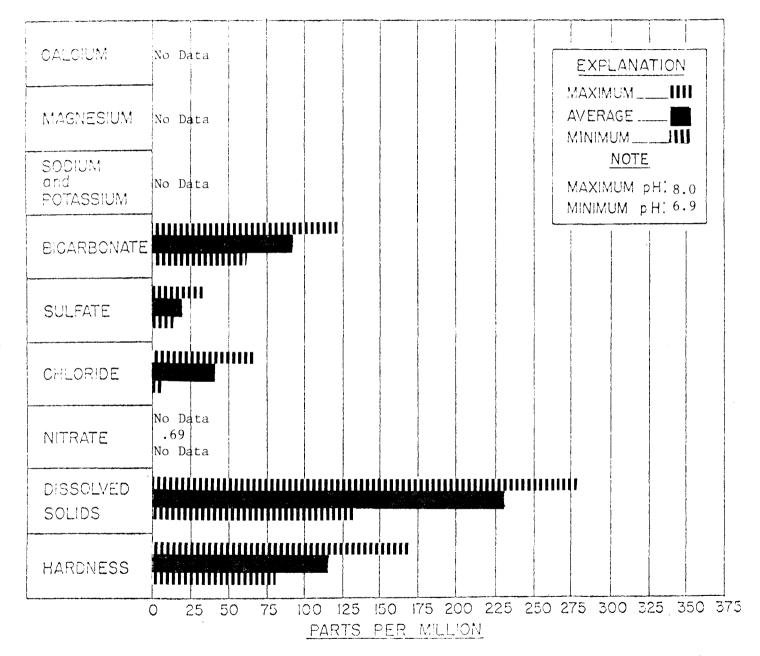


FIGURE F-6
Pond River
Apex
4-61 to 8-72

MAXIMUM, AVERAGE, and MINIMUM concentrations of dissolved constituents

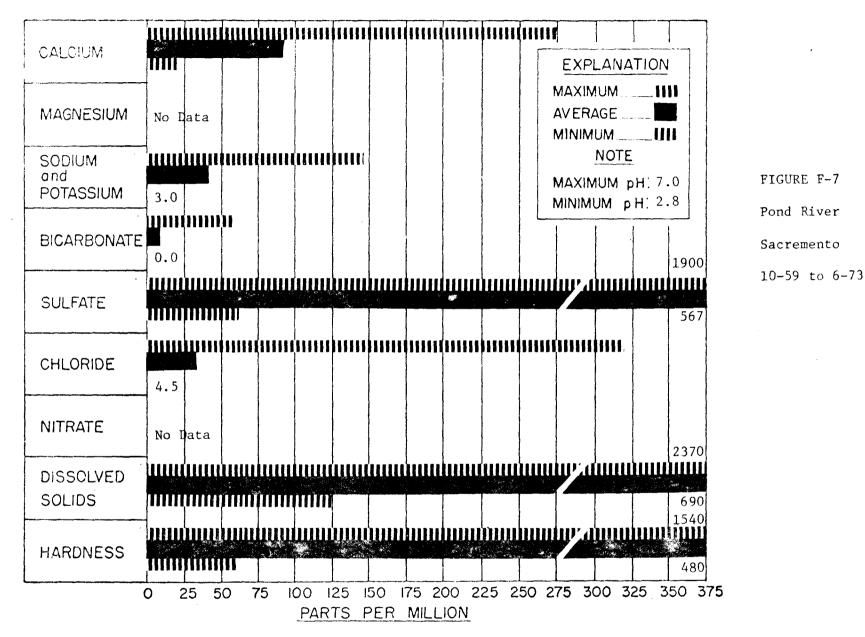


MAXIMUM, AVERAGE, and MINIMUM concentrations of dissolved constituents,

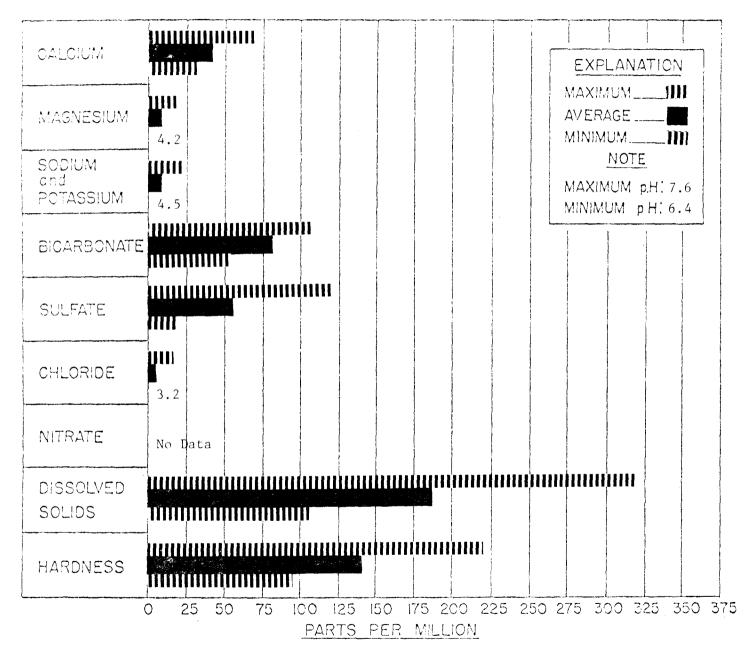

Green River
Beech Grove.
1-75 to 12-75

FIGURE F-8


MAXIMUM, AVERAGE, and MINIMUM concentrations of dissolved constituents

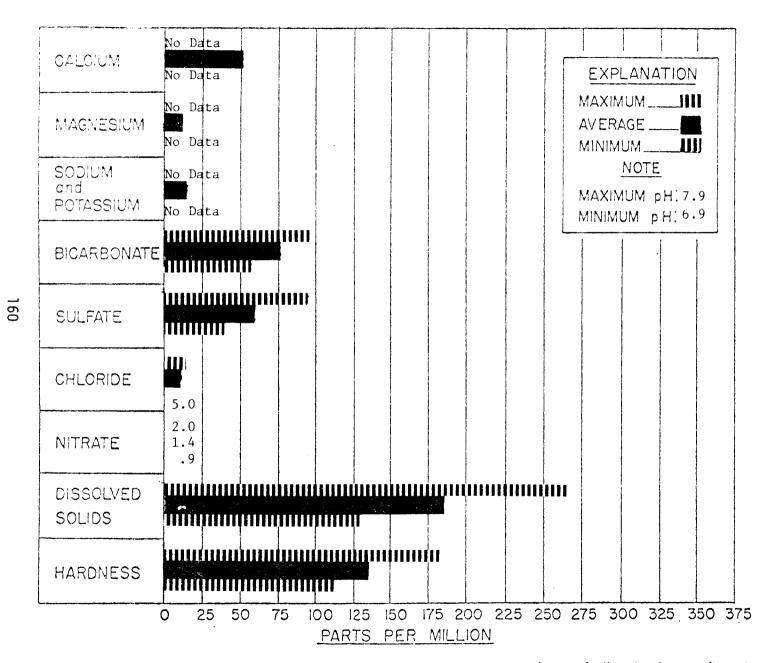

Green River
Lock 1
4-70 to 8-72

FIGURE F-9

MAXIMUM, AVERAGE, and MINIMUM concentrations of dissolved constituents

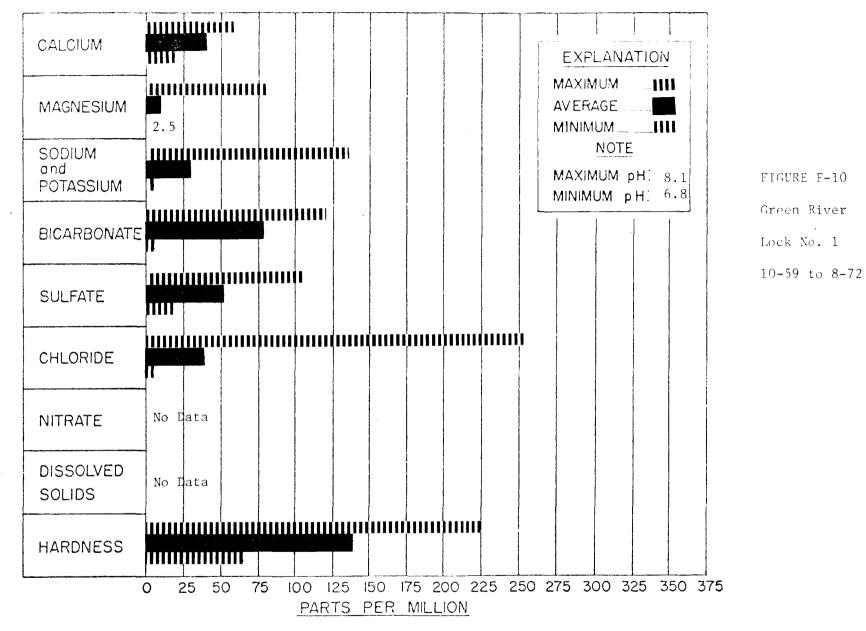

MAXIMUM. AVERAGE, and MINIMUM concentrations of dissolved constituents,

C. Trace Chemical Water Quality

Trace elements under 5.0 mg/l are separated from the general chemical background of this report because of their influence on human health. Generally, these materials are "heavy" metals, which in sufficient concentrations have a toxic or otherwise adverse effect on human and animal or plant life. Levels for many of these elements have been established for years in the Drinking Water Standards and more recently through the State-Federal Water Quality Standards.

As a part of the monitoring strategy for Kentucky, "Special Surveys" will be undertaken to determine the causes of these levels.

D. Waste Load Affect on Water Quality

piochemically degradable wastes impose a load on the dissolved oxygen recourses of a stream. Such waste loads are considered to have an adverse effect on water quality when they cause the dissolved oxygen (D.O.) concentration of the water to drop below the Kentucky Water Quality Standard of 5.0 mg/l. Approximately 1,670 miles of stream length were studied using a model to determine waste load allocation. The model was developed for the Kentucky Continuing Planning Process for River Basin Management Planning. Using this model it was determined that approximately 214 miles (12.8 percent) of the studied length would have a D.O. concentration of less than 5.0 mg/l. The design flow is equal to the ten year seven day low flow for this study, zero in many of the tributaries.

There were 214 miles of stream length affected, of which 172 miles (10.3 percent) will be affected by municipal discharges, 7 miles (0.4 percent) are affected by industrial discharges and 34 miles (2.1 percent) are affected

by other discharges such as schools, trailer parks, subdivision, etc. These results are listed in Table F-11 in the Appendix.

E. Non-Point Source Effects

The major non-point sources in the Green River Basin are acid mine drainage, siltation, agricultural runoff, and storm drainage from large cities located near low flow streams. The acid mine drainage and much of the siltation is caused by the coal production which is located primarily in Muhlenberg, Hopkins and Ohio Counties. Small receiving streams affected by acid mine drainage cannot support permanent fish life, and water quality is deteriorated by major increases in hardness (calcium sulfate). A map showing the streams constantly affected by mining is included in the Appendix. Oil production (ten million barrels per year) in Kentucky results in some brine waste, the influence on water quality in the Green River Basin is revealed from the Water Quality graphs.

A Soil Conservation Service report indicates 18 million tons of sediment from erosion is entering the Green River stream system annually.

- 53 percent of the sediment is produced by erosion from the basin's cropland.
- 2. 25 percent of the sediment is produced by gully erosion.
- 3. 12 percent of the sediment is produced by erosion from disturbed forest lands.
- 4. 10 percent of the sediment is produced from erosion on previously surface mined lands, newly disturbed surface mined lands, 1,600 miles of roadbank erosion and 600 miles of streambank erosion.

Siltation impact has been reduced by silt retaining structures, diversion ditches and terraces, but this phenomena will represent a significant problem until quick vegetative cover and good soil conservation practices are universally applied.

Storm water runoff from large cities could represent a significant non-point source where this runoff enters a stream with a small dilution ratio. The cities in the basin in this category are Glasgow, Elizabethtown and Madisonville.

F. Water Uses in the Basin

Water uses in the basin are public, industrial, recreational, fish and wildlife and agricultural.

Public water use consists of 18.6 million gallons per day, 14.7 million gallons per day of which is from surface water sources and 3.7 million gallons per day is from groundwater sources.

Industrial water usage consists of 10.5 million gallons per day, 9.8 million gallons per day which is from surface sources and 776,000 gallons per day is from groundwater sources. A complete table for public and industrial water usage (Table F-12) is included in the Appendix.

Approximately 96,000 acres of land and 35,000 acres of water are used for recreational purposes in the area. Four Corps of Engineers' developments account for 29,000 acres of water and 34,000 acres of adjacent land. In 1969, the attendance at the four reservoir areas was nearly 2.9 million visitor days, the Rough River had 1,162,500 visitor days, the Nolin River had 345,500, the Barren River had 875,200, and the Green River had 509,400 visitor days.

Other recreational opportunities exist on 2,600 acres of water in completed PL 566 United States Department of Agriculture, Soil Conservation Service watershed developments and about 3,400 acres of water in State, County, City and privately owned developments.


Habitat for aquatic wildlife and fishes in the basin is provided by 87 principal streams with a total length of 1,600 miles: four large Corps of Engineers' water impoundments; seven other lakes over 100 acres; and numerous smaller lakes and farm ponds. There are 190 species of fishes found in Kentucky and probably 75 percent of these can be found in the Green River Basin.

Generally, water in the basin is widely used in the agricultural industry, primarily for livestock watering with a small amount used for irrigation. In the Pond River sub-basin, water quality is sufficiently degraded so that it is not accepted for agricultural usage.

III. Summary

Water Quality in the Green River Basin is generally good. The water is slightly basic, hard, slightly salty and low in sulfates. Attention is needed, however, in the streams where coal is being produced. Since coal production is expected to increase dramatically, the influence on the rest of the basin is likely to become pronounced. Also, 21 municipal discharges need to be upgraded to meet a dissolved oxygen (D.O.) concentration of 5.0 mg/l during periods of low flow. The trace chemical water quality in the Green River Basin is good with the exception of the periodic high lead levels in the Green River at Munfordville and the high fluoride levels in the Pond River at Sacramento. The exact causes of these phenomena are not known at this time and further study is needed. Further study is also needed for the quality of storm water runoff leaving large cities and developed areas and entering small streams.

GREEN RIVER

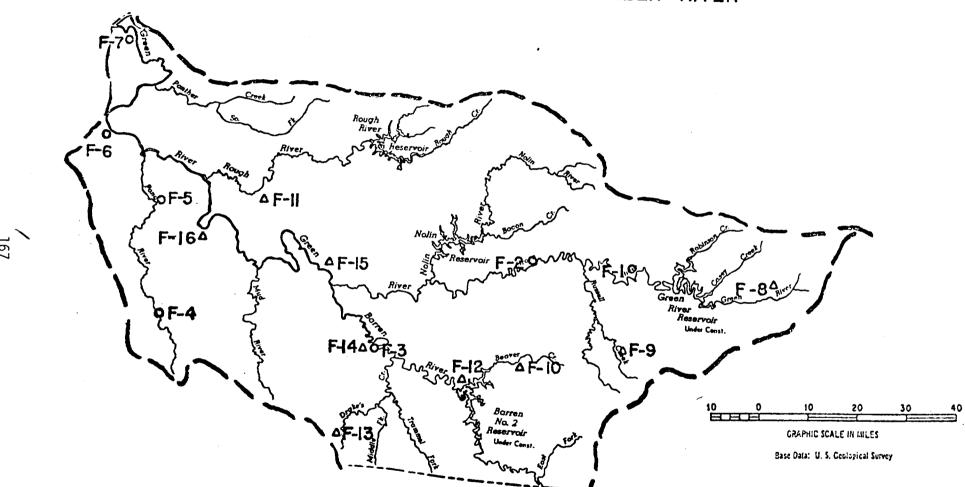

STATION KEY

- F-I GREEN RIVER AT GREENSBURG
- F-2 GREEN RIVER AT MUNFORDVILLE
- F-3 BARREN RIVER AT BOWLING GREEN
- F-4 POND RIVER AT APEX
- F-5 POND RIVER AT SACREMENTO
- F-6 GREEN RIVER AT BEECH GROVE
- F-7 GREEN RIVER AT LOCK I
- F-8 GREEN RIVER AT LIBERTY
- F-9 RUSSELL CREEK AT COLUMBIA
- F-IO BEAVER CREEK AT GLASGOW
- F-II ROUGH RIVER AT HARTFORD
- F-12 BARREN RIVER AT BARREN RESERVOIR
- F-13 DRAKES CREEK AT FRANKLIN WPI
- F-14 BARREN RIVER AT BOWLING GREEN WP1
- F-15 GREEN RIVER AT MORGANTOWN WPI
- F-16 GREEN RIVER AT CENTRAL CITY W P I

TABLE F-1
Drainage Areas in the Green River Basin

-	COUNT AREA (SQ.M	COUN	TY IN BAS:	
– Ada	ir 393	353	90	
All	en 364	364	100	
3 a r	ren 486	486	100	
	ckinridge 564	243		
But	ler 443	443		
Cas		341	79	
Chr	istian 726	161	22	
Jav	iess 462	378	82	
Edm	onson 304	304		
_ Gra	yson 512	512	100	
Gre		282	100	
Han	cock 187	29	16	
Har		400	65	
- Har	t 425	425	100	
Hen	derson 433	121	28	
Нор	kins 553	278	50	
_ Lar	ue 260	171	65	
Lin	coln 340	60	17	
Log	an 563	329	5 8	
McL	ean 257	257	100	
_ Met	calfe 296	258	87	
Mon	roe 334	225	68	
Muh	lenberg 481	481	100	
- Ohi	o 596	596	100	
Pul1	aski 654	0	.1 0.	1
Rus	sell 238	67	28	
_ Sim	pson 239	143	60	
Tay	lor 284	284	100	
Tod		137	37	
_ War	ren 546	546	100	
Web	ster 339	141	42	
	total 12,988.00	8,821	68	
	nessee Area	408		
Tot	al Drainage Basin	9,229		

Source: Soil Conservation Service Type IV Draft river basin report for the Green River, 1975

Table F-2
Slopes of Streams in the Green River Basin

Sub-bas in	Average Slope (feet/mile)	Drainage Area (mi²)
Russell Creek	5.4	289
Little Barren River	7.7	282
Nolin River - Upper Reaches	4.7	727
Lower Reaches	2.5	
Barren River - Upper Reaches	7.7	2,262
Lower Reaches	1.0	
Mud River	3.0	375
Rough River	0.8	1,081
Pond River	1.9	799
Panther Creek	1.5	374
Green River - Upper Reaches	6.6	9,229
Lower Reaches	n/a	

NOTE: This information is from the waste load allocation for Kentucky and is an output from the 303e river basin planning effort.

Table F-3

Locks and Dams in the Green River Basin

Lock and Dam	Mile	Length of Pool	Pool Elevation
1	9	54	349
2	63	45	363
3	108	36	380
4	145	23	396
5	168	14	411
6	182	18	421
Green River Reservoir	306		

Source: Kentucky Department for Natural Resources and Environmental Protection, Division of Water Resources

Coal Production by County and Type of Mining in the Green River Basin

Table F-4

Coal Mining Methods (Tons) Underground Total Strip Auger County 204,200 Butler 133,100 71,100 80,500 80,500 Christian 1,012,400 1,012,400 Daviess 92,600 92,600 Henderson 5,162,600 2,752,300 76,000 Hopkins 2,333,600 1,108,700 1,108,700 McLean 26,083,800 5,104,200 136,000 Muhlenberg 20,843,600 6,435,300 4,899,500 1,535,800 Ohio 30,411,400 9,556,000 212,700 40,180,100 Totals Percent of 75 24 1 100 Totals

Source - Annual Report of the Department of Mines and Minerals for Kentucky, 1973.

Table F-5
Allowable Bench Width in Strip Mining

Slope in Degrees	Maximum Bench Width
12° - 14°	220'
15° - 18°	170'
19° - 20°	155'
21°	140'
22°	130'
23°	120'
24°	110'
25°	100'
26°	90'
27°	80'
Auger Only	
28°	60'
29° - 30°	55'
31° - 33°	45'
33° + No Fill Bench	

Source: Kentucky Department for Natural Resources and Environmental Protection, Division of Reclamation

Table F-6
Oil Production by County for Selected Years in the Green River Basin

			Year	
County	1969	1970	1971	1972
		-	-Barrels-	
Adair	7,545	275,930	330,750	293,334
Allen	61,850	47,398	39,123	36,073
Barren	11,413	10,106	12,343	11,186
Breckinridge	5,248	5 ,64 8	7,766	7,666
Butler	62,124	54,290	47,008	59,827
Casey	12,698	11,872	7,325	5,274
Christian	40,223	38,735	38,293	33,737
Daviess	997,693	786,376	720,236	584,490
Edmonson	449	428	510	36 8
Grayson				
Green	112,019	71,042	62,950	44,604
Hancock	11,990	11,426	11,341	10,230
Hardin				
Hart	16,670	15,390	15,455	13,171
Henderson	555,931	477,206	397,706	328 ,49 2
Hopkins	427,640	396,358	414,692	354,246
Larue				
Logan	746	1,496	741	391
McLean	686,140	584,665	551,354	558 ,6 65
Metcalfe	81,638	74,030	62,142	486,541
Monroe	15,447	15,006	12,536	10,955
Muhlenberg	405,689	346,307	300,467	253,187
Ohio	467,421	385,412	328,608	276,390
Pulaski				
Russell	158	45	_ 49	356
Simpson	2,303	6,744	7,074	6,033
Taylor	43	255	78	
Todd	55		389	453
Warren	23,770	22,364	20,380	21,919
Webster	367,382	281,785	270,452	298,728

Source: Soil Conservation Service Type IV Draft River Report for the Green River, 1975

Table F-7

Lakes in the Green River Basin

Corps of Engineers Impoundments	Seasonal Capacity	Seasonal Area
Barren River Lake	190,280	10,000 AC
Rough River Lake	90,210	5,100 AC
Nolin Lake	170,200	5,790
Green River Lake	81,500	8,200
Total	532,190 AC-Ft.	29,090 AC
Other Impoundments Over 100 Acres	Capacity (AC-Ft.)	Area (AC)
Lake Herndon	2,265	147
Valley Creek MPS#4	1,830	160
Lake Malone	14,250	826
Shanty Hollow Lake	1,607	135
Big Muddy Creek F.R.S.#2	375	105
Mill Creek MPS#4	1,705	109
Mud River MPS#6A	3,218	240
Peabody Coal - New River Queen Slurry Dam	3,907	162
Peabody Coal - Alston Mine-Area VI Dam	1,180	50
Total	30,330 AC-Ft.	1,930 AC

Source: Kentucky Department for Natural Resources and Environmental Protection, Division of Water Resources

TABLE F-8
Population Distribution in the Green River Basin

COUNTY	1970 URBAN POPULATION**	TOTAL RURAL	TOTAL POPULATION* IN BASIN
Adair Allen Barren	3234	9803	12,100 12,600 28,700
Breckinridge Butler	4235	10554	4,550 9,720
Casey	1765	11165	8,760
Christian	22665	33559	7,450
Daviess	5108 1 .	28405	24.000
Edmonson			8,750
Grayson			16,500
Green	2857	4223	10,400 670
Hancock Hardin	26520	4223 51901	45,800
Hart	20320	31301	14,000
Henderson	23856	12175	3,400
Hopkins	23637	14530	27,900
Larue	3114	7558	8,100
Lincoln	3748	12915	2,270
Logan	9240	7607	15,900
McĽean			9,060
Metcalfe	958	7219	7,250
Monroe	2766	8876	8,760
Muhlenberg			27,500
Ohio.			18,800
Pulaski	0.550	7074	0
Russell	2668	7874	2,210
Simpson	6553	6501	10,500
Taylor	7598 2200	6540 7515	17,000 2,530
Todd	3308	/313	57 , 400
Warren Webster	7865	5417	3,620
MGD2 CGI	7003	5717	0,020
Total	150,000	276,000	426,000

^{*} Approximate measurement \pm 10 per cent based on U.S. Census Data

^{**} U. S. Census Data

Table F-9
City Population and Facility Grant Status in the Green River Basin in Kentucky

•	County	City	Population	Project Type	Comments
-	Adair	Columbia	3,234	1	Acti v e
_	Allen	Scottsville	3, 584	1	Acti v e
.	Barren	Cave City (Park City) Glasgow	1,818 567 11,301	1 1 3	Pending Pending Acti v e
	Breckinridge				
•	Butler	Morgantown	1,394	1	Acti v e
_	Casey	Liberty	1,765	1	Acti v e
	Christian	Crofton	631	1	Acti v e
	Daviess	Whitesville	752	1	Acti v e
	Edmonson	Brownsville	542	None	Sewers/STP
•	Grayson	Caneyville Leitchfield- (Clarkson)	530 2,983 660	1 1 2	Acti v e Acti v e Pending
•	Green	Greensburg	1,990	None	Sewers/STP
•	Hancock				
	Hardin	Sonora Elizabethtown	390 11,748	None 1	No Sewers Active
	Hart	(Munfordsville) (Horse Cave) Bonnieville	1,233 2,068 328	1 1 1	Pending Pending Pending
	Henderson				
	Hopkins	Madisonville- (Earlington) (Hanson) Morton's Gap Nortonville White Plains	15,332 2,321 378 1,169 699 729	1 & 2 1 & 2 None None 1 None	Active Active No Sewers No Sewers Active No Sewers

Table F-9 Continued

County	City	Population	Project Type	Comments
Larue	Upton Hodgenville	552 2,562	None 1	No Sewers Acti v e
Lincoln				
Logan	Russellville Auburn Lewisburg	6,456 1,160 651	l None None	Active Sewers/STP Sewers/STP
McLean	Calhoun Sacramento Island Livermore	901 437 410 1,594	3 None 1 1	Active No Sewers Active Active
Metcalfe	Edmonton	958	1	Act iv e
Monroe	Gamaliel Tompkinsville Fountain Run W. D.	431 2,207 128	None 1 1	No Sewers Acti v e Acti v e
Muhlenburg	Greenville- (Central City) (Powderly) Drakesboro	3,875 5,450 631 907]]]	Active Active Active Active
Ohio	Beaver Dam- (Hartford) (McHenry) Fordsville Centertown Rockport	2,622 1,868 420 489 323 377	l l l None None	Active Active Active Active No Sewers No Sewers
Pulaski				
Russell				
Simpson	Franklin	6,533	1	Acti v e
Taylor	Campbellsville	7,598	1 & 2	Acti v e
Todd				
Warren	Smiths Grove Woodburn Bowling Green	756 351 36,253	None None 1	No Sewers No Sewers Active

Table F-9 Continued

County	City	Population	Project Type	Comments
Webster	Slaughters	276	l	Active
	Sebree	1 , 092	None	Sewers/STP

NOTE: Project type is related to the grant process step applied for or active for each municipality. Step 1 is the preliminary studies (201 Facilities Plan) required before design of the facilities. Step 2 is the design phase of the project, and Step 3 is the construction of facilities for the collection and treatment of wastewaters.

The comments relate to the status of the grant. Active indicates the project is funded and underway. Pending indicates that application for a grant has been made and is pending approval. No sewers indicates that the municipality does not presently have a comprehensive sewer system. Sewers/STP indicates the municipality is now served by sewers and treatment facilities.

The source of this information was the 1970 U. S. Census and the FY 77 construction grants list for Kentucky.

Table F-10
Water Quality Data for Green River Basin

Station	Beg. Date	End Date	Mean	Max.	Min.	#0BS	S
STORET #00400	pH Specif	ic Units K	y. Std.	6 LT p	H LT 9		
Green R., Greensburg	76/01/19 70/03/03 59/10/14	76/12/07 72/08/24 76/08/24	6.8 7.3 7.2	8.5 7.8 8.1	6.0 7.1 6.4	10 9 113	.734 .250 .317
Green R., Munfordville USGS 03308500	70/01/10 65/01/12 59/10/09	73/09/12 73/09/12 73/09/12	7.7 7.7 7.6	8.4 8.6 9.6	6.8 6.8 6.5	90 208 400	.392 .366 .405
Barren R., Bowling Green USGS 03314500	75/06/03 70/02/11 65/11/09 59/10/16	75/06/03 74/04/09 74/04/09 74/04/09	6.1 7.8 7.7 7.5	8.1 8.2 8.2	7.5 6.8 6.6	1 12 31 45	.241 .330 .396
Pond R., nr. Apex USGS 03320500	70/09/25 61/04/12	72/08/17 72/08/17	7.5 7.4	8.0 8.0	7.0 6.9	3 5	.503 .439
Pond R. nr. Sacramento USGS 03321100	70/03/03 65/02/05 59/10/17	73/07/16 73/07/16 73/07/16	4.8 4.4 4.0	7.0 7.0 7.0	3.3 2.8 2.8	14 32 73	1.45 1.34 1.39
Green R., nr. Beech Grove USGS 03321230	76/01/19 75/01/07	76/12/07 76/12/ 07	6.8 7.0	8.5 8.5	6.0 6.0	10 22	.734 .585
Green R. at Lock 1 USGS 03321500	70/04/14 66/01/19 59/10/10	72/08/16 72/08/16 72/08/16	7.5 7.5 7.4	7.9 8.1 8.1	6.9 6.9 6.8	10 27 35	.374 .306 .317
STORET #00095	Conductiv	ity Microm	nhos				
Green R., Greensburg	76/03/26 70/01/21 59/10/14	76/10/22 75/11/20 76/10/22	151.4	150.0 280.0 2570.0	110.0 120.0 72.0	3 19 141	23.095 37.125 227.320
Green R., Munfordville	70/01/10 65/01/12 59/10/09	73/09/12 73/09/12 73/09/12	337.9 1	380.0	33.0 47.0 47.0	90 217 432	103.1 192.2 732.5

Table F-10 Continued

-	Station	Beg. Date	End Date	Mean	Max.	Min.	#OBS	S
-	Barren R., Bowling Green	76/01/28 70/02/11 59/10/16	76/11/17 75/11/12 76/11/17	278.0 237.6 251.1	380.0 1 298.0 1 380.0 1	45.0	5 25 77	86.429 36.016 42.476
_	Pond R., nr. Apex	76/01/29 70/09/25 61/04/12	76/11/15 75/11/11 76/11/15	320.0 352.4 321.0	440.0 1 483.0 2 483.0 1	07.0	5 5 12	93.005 128.095 103.475
-	Pond R., nr. Sacramento	70/03/03 65/02/05 59/10/17	73/07/16 73/07/16 73/07/16	1406.6	2140.0 3230.0 3230.0	143.0	17 41 82	565.4 881.9 800.6
_	Green R., Beech Grove	76/01/19 74/10/16	76/12/07 76/12/07	316.7 307.7	450.0 500.0	230.0 190.0	12 27	61.288 72.117
-	Green R. at Lock 1	70/01/26 66/01/19 59/10/10	72/08/16 72/08/16 72/08/16	294.9 316.2 378.3		237.0 234.0 154.0	18 39 84	47.4 63.6 177.0
-	STORET #70300	Dissolved	Solids mo	j/l Ky.	Std. 50	0		
-	Green R., Greensburg	70/03/03 65/01/20 59/10/14	72/08/24 72/08/24 72/08/24	93.4 110.1 107.8	124.0 496.0 566.0	77.0 58.0 58.0	9 50 112	15.4 60.3 61.2
-	Green R., Munfordville	70/01/10 65/01/12 59/10/09	73/09/12 73/09/12 73/09/12	159.2 195.7 309.7	296.0 768.0 5830.0		90 215 422	58.7 104.8 430.3
_	Barren R., Bowing Green	76/04/21 70/02/11 59/10/16	76/11/17 75/07/15 76/11/17	189.7 140.0 147.0	213.0 175.0 213.0	148.0 82.0 82.0	3 17 51	36.172 24.298 24.603
-	Pond R. nr. Apex	70/09/25	72/08/17	230.0	278.0	138.0	3	79.7
-	Pond R. nr. Sacramento	70/03/03 60/02/05 59/10/17	73/07/16 73/07/16 73/07/16	957.7 1084.2 856.3	2020.0 2960.0 2960.0	128.0	14 31 72	587.9 754.9 665.0
	Green R., Beech Grove	76/01/19 74/10/16 74/10/16	76/11/09 75/12/08 76/11/09	205.7 184.1 192.8		142.0 104.0 104.0	10 15 25	46.624 58.257 53.956

Table F-10 Continued

Station	Beg. Date	End Date	Mean	Max.	Min.	#0BS	S
Green R., Lock 1	70/04/14 66/01/19 59/10/10	72/08/16 72/08/16 72/08/16	195.9	259.0 298.0 572.0	128.0 128.0 105.0	10 27 69	44.3 44.6 88.4
STORET #00410	Alkalinit	y mg/l					
Green R., Greensburg	70/03/03 66/10/19 59/10/14	72/08/24 72/08/24 72/08/24	53.8 61.1 60.7	75.0 114.0 114.0	43.0 30.0 30.0	9 21 35	9.8 20.6 17.5
Green R., Munfordville	70/01/10 65/01/31 59/10/09	73/09/12 73/09/12 73/09/12	90.7 95.2 95.5	141.0 141.0 153.0	40.0 40.0 40.0	90 167 220	27.8 26.7 25.3
Barren R., Bowling Green	76/04/21 75/07/15 59/10/16	76/11/17 70/02/11 76/11/17	134.0 95.5 102.8	155.0 125.0 155.0	107.0 57.0 46.0	17	24.556 16.306 20.166
Pond R., nr. Apex	70/09/25 61/04/12	72/08/17 72/08/17	106.3 91.0	124.0 124.0	74.0 60.0	3 5	28.0 29.4
Pond R., nr. Sacramento	70/03/03 67/04/05 59/10/17	73/07/16 73/07/16 73/07/16	7.4 5.6 8.7	43.0 43.0 57.0	.00 .00	14 25 50	12.2 10.9 12.7
Green R., Beech Grove	76/01/19 74/10/16	76/11/09 76/11/09	82.0 82.2	107.0 107.0	59.0 52.0	11 26	17.263 16.555
Green R., Lock 1	70/04/14 66/10/18 59/10/31	72/08/16 72/08/16 72/08/16	75.9 74.2 79.1	94.0 107.0 119.0	57.0 44.0 44.0	10 21 39	12.8 16.5 17.7
STORET # 00900		(mg/l) Ky. ard, over				20 har	rd,
Green R., Greensburg	65/01/20	72/08/24 72/08/24 72/08/24	77.7	195.0	55.0 44.0 35.0	9 50 103	26. 8

Table F-10 Continued

-	Station	Beg. Date	End Date	Mean	Max.	Min.	#OBS	S
-	Green R., Munfordville	70/01/10 65/01/12 59/10/09	73/09/12 73/09/12 73/09/12	110.4 123.7 95.5	170.0 387.0 153.0	59.0 50.0 40.0	90 207 2 2 0	33.4 44.9 25.3
-	Barren R., Bowling Green	76/04/21 70/02/11 59/10/16	76/11/17 75/07/15 76/11/17	160.0 113.4 122.5	190.0 140.0 190.0	130.0 71.0 52.0	3 12 53	30.000 18.829 22.915
-	Pond R., nr. Apex	70/09/25 61/04/12	72/08/17 72/08/17	135.7 115.8	170.0 170.0	90.0 80.0	3 5	41.2 40.1
-	Pond R., nr. Sacramento	70/03/03 65/02/05 59/10/17	73/07/16 73/07/16 73/07/16	620.7	1200.0 1540.0 1540.0	220.0 58.0 58.0	13 31 67	324.0 403.0 369.9
-	Green R., Beech Grove	76/01/19 74/10/16	76/11/09 76/11/09	141.0 140.2	200.0 220.0	100.0 95.0	10 25	27.669 31.836
-	Green R., Lock 1	70/04/14 66/01/19 59/10/10	72/08/16 72/08/16 72/08/16	133.1 137.9 137.2	180.0 200.0 225.0	110.0 94.0 64.0	10 27 72	23.7 27.5 34.3
_	STORET #00080	Color Pla	tinum-Coba	lt unit	s EPA S	i td. 75 u	ınits	
<u>.</u>	Green R., Greensburg	71/04/07 65/01/20 59/10/14	71/04/07 71/04/07 7/04/07	3.0 6.8 11.6	25.0 130.0	2.0	1 21 82	5.11 15.8
-	Green R., Munfordville	70/11/01 65/01/12 59/10/09	72/10/15 72/10/15 72/10/15	1.7 9.9 9.2	5.0 50.0 55.0	.00 .00 .00	3 67 253	2.88 9.53 9.53
-	Barren R. at Bowling Green	71/03/15 66/07/20 59/10/16	71/03/15 71/03/15 71/03/15	.00 3.2 5.9	5.0 38.0	.00	1 5 17	2.16 8.49
-	Pond R., nr. Sacramento	70/12/01 65/02/05 59/10/17	73/07/16 73/07/16 73/07/16	4.0 4.5 7.0	5.0 7.0 56.0	2.0 5.0 55.0	3 8 46	1.73 2.17 10.8

Table F-10 Continued

Station	Beg. Date	End Date	Mean	Max.	Min.	#OBS	S
Green R., Lock 1	71/04/27 66/07/22 59/10/10	71/04/27 71/04/27 71/04/27	3.0 6.8 7.0	17.0 40.0	3.0 1.0	1 5 48	5.76 8.25
STORET #00930	Sodium N	o Standard					
Green R., Greensburg	71/04/07 65/11/09 59/10/14	71/04/07 71/04/07 71/04/07	2.20 11.3 7.8	108.0 121.0	2.2 1.60	1 13 51	29.1 21.9
Green R., Munfordville	70/11/01 68/11/25 59/11/08	72/10/15 72/10/15 72/10/15	25.7 48.0 76.7	45.0 84.0 478.0	12.0	3 5 54	17.2 33.0 99.5
Barren R., Bowling Green	76/04/21 71/03/15 59/10/16	76/11/17 75/07/15 76/11/17	4.4 2.8 3.6	6.1 4.6 6.1	1.5	3 7 27	1.563 1.053 1.165
Pond R., nr. Sacramento	70/2/01 59/10/17	73/07/16 73/07/16	28.3 39.1	46.0 139.0	17.0 5.4	3 38	15.5 31.3
Green R., Beech Grove	76/01/19 74/10/16	76/11/09 76/11/09	6.8 6.5	11.0 1 5.0		10 25	2.387 2.878
Green R., Lock 1	71/04/27 66/07/22 59/10/10	71/04/27 71/04/27 71/04/27	12.0 12.1 27.9	18.0 132.0	6.3 4.2	1 5 56	4.59 28.0
STORET #00935	Potassium	mg/l No	Standar	d			
Green R., Greensburg	71/04/07 65/11/09 59/10/14	71/04/07 71/04/07 71/04/07	1.7 1.7 1.5	3.4 3.4	.9 .4	1 13 51	.728 .630
Green R., Munfordville	70/11/01 68/11/25 59/11/26	72/10/15 72/10/15 72/10/15	2.3 2.5 2.1	2.7 2.9 5.2	2.0 2.0 .8	3 5 21	.361 .370 .957
Barren R., Bowling Green	76/04/21 71/03/15 59/10/16	76/11/17 75/07/15 76/11/17	1.5 2.2 1.6	1.8 5.0 5.0	1.3 1.0 0.5	3 7 27	.252 1.360 .864

Table F-10 Continued

_	Station	Beg. Date	End Date	Mean	Max.	Min.	#0BS	S
-	Pond R., nr. Sacramento	70/12/01 66/09/08 59/10/17	73/07/16 73/07/16 73/07/16	7.5 6.4 3.5	15.0 15.0 15.0	3.6 3.6 .9	3 7 38	6.52 3.91 2.52
	Green R., Beech Grove	76/01/19 74/10/16	76/11/09 76/11/09	3.0 2.6	11.0 11.0	1.4	10 25	2.863 1.980
-	Green R., Lock 1	71/04/27 66/07/22 59/10/10	72/04/27 72/04/27 71/04/27	2.4 2.2 1.9	2.9 4.1	1.6	1 5 54	.484 .738
	STORET #00940	Chloride	mg/l Prep.	EPA St	d. 250	mg/1		
-	Green R., Greensburg	70/03/03 65/01/20 59/10/14	72/08/24 72/08/24 72/08/24	2.9 8.1 15.4	3.7 212.0 750.0	2.1 1.0 1.0	9 50 114	.6 29.5 75.4
_	Green R., Munfordville	70/01/10 65/01/12 59/10/09	73/09/12 73/09/12 73/09/12	19.2 37.1 104.4	80.0 350.0 3250.0	3.0 3.0 3.0	90 217 425	17.5 48.6 241.6
_	Barren R., Bowling Green	76/04/21 75/07/15 59/10/16	76/11/17 70/02/11 76/11/17	8.2 5.3 6.7	12.0 6.9 12.0	5.2 2.9 2.9	3 17 53	3.459 1.216 2.019
-	Pond R., Apex	61/04/12	72/08/17	33.7	64.0	9.5	5	25.8
-	Pond R., nr. Sacramento	70/03/03 65/02/05 59/10/17	73/07/16 73/07/16 73/07/16	14.2 16.5 33.0	31.0 46.0 318.0	8.7 4.5 4.5	14 31 71	6.46 9.54 44.7
_	Green R., Beech Grove	76/01/19 74/10/16	76/11/09 76/11/09	6.6 6.4	13.0 14.0	3.0 3.0	10 25	3.398 2.962
-	Green R., Lock 1		72/08/16 72/08/16 72/08/16	9.1 12.5 39.4	13.0 28.0 254.0	5.0 5.0 5.0	10 27 72	2.47 5.75 51.4
-	STORET #00945	Sulfate m	ıg/l Prop.	EPA Sto	d 250 mg	ı/1		

Table F-10 Continued

Continued	Beg.	End					
Station	Date	Date	Mean	Max.	Min.	#OBS	S
Green R., Greensburg	70/03/03 65/01/20 59/10/14	72/08/24 72/08/24 72/08/24	15.3 17.0 15.5	19.0 46.0 46.0	14.0 12.0 9.6	9 50 113	1.93 5.45 21.2
Green R., Munfordville	70/01/10 65/01/12 59/10/09	73/09/12 73/09/12 73/09/12	16.5 18.1 17.9	29.0 35.0 106.0	9.0 9.0 7.4	90 207 398	3.39 4.72 7.05
Barren R., Bowling Green	76/04/12 70/02/11 59/10/16	76/11/17 75/07/15 76/11/17	19.3 17.8 17.5	25.0 30.0 36.0	16.0 10.0 8.0	3 17 53	4.933 4.931 4.858
Pond R., nr. Apex	70/09/25 61/04/12	72/08/17 72/08/17	22.0 20.2	32.0 32.0	16.0 16.0	3 5	8.72 6.65
Pond R., Sacramento	70/13/03 65/02/05 59/10/17	73/07/16 73/07/16 73/07/16	628.0 776.6 569.0	1400.0 1900.0 1900.0		14 31 72	401.1 551.4 491.3
Green R., Beech Grove	76/01/19 74/10/16	76/11/09 76/11/09	59.6 56.7	110.0 120.0	34.0 16.0	10 25	20.619 28.469
Green R., Lock 4	70/04/14 66/01/19 59/10/10	72/08/16 72/08/16 72/08/16	59.6 62.2 51.1	93.0 107.0 107.0	34.0 32.0 17.0	10 27 72	19.8 19.8 21.5
STORET #00618	Nitrate m	ng/l Prop.E	PA Std.	10 mg/	1		
Green R., Greensburg	72/07/20 66/10/19 60/10/11	72/08/24 72/08/24 72/08/24	.30 .44 .43	1.0	.16 .09	1 4 6	.379 .360
Green R., Munfordville	71/11/26 61/04/12	73/09/12 73/09/12	.88 .86			46 47	.278 .286
Barren R., Bowling Green	76/04/21 71/12/29 61/04/11	76/08/26 75/07/15 76/08/26	1.1 0.8 .7	1.3 1.2 1.3	0.8 0.5 0.1	2 10 15	.325 .220 .304
Pond R., nr. Apex	72/08/17	72/08/17	.69			1	
Pond R., nr. Sacremento	71/08/05	73/07/16	.42	.70	0 .18	7	.248
Green R., Lock 1	72/02/09	72/08/16	1.4	2.0	.9	3	.513

Table F-10 Continued

-	Station	Beg. Date	End Date	Mean	Max.	Min.	#0BS	S
_	STORET #00950	Fluoride	mg/l Ky. S	td. 1.0 m	g/1			
_	Green R., Greensburg	70/09/08 65/11/09 59/10/14	72/08/24 72/08/24 72/08/24	.075 .118 .147	.10 .50 .50	.00	4 16 55	.050 .155 .116
-	Green R., Munfordville	70/09/09 68/11/25 59/10/15	72/10/27 72/10/27 72/10/27	.142 .144 .183	.20 .20 .50	.10 .10 .10	7 9 36	.053 .053 .102
-	Barren R., Bowling Green	76/04/21 70/09/14 59/10/16	76/11/17 75/07/15 76/11/17	0.2 8:1	0.2 0.3 0.3	0.1 0.0 0.0	3]] 3]	.058 .089 .079
-	Pond R., nr., Apex	70/09/25 61/04/12	72/08/17 72/08/17	.133 .120	.20	.10 .10	3 5	.058 .045
-	Pond R., nr. Sacramento	70/09/15 65/10/13 59/10/17	73/07/16 73/07/16 73/07/16	1.36 1.60 1.03	3.30 3.30 3.30	.50 .30 .00	7 13 44	.950 .976 .962
-	Green R., nr. Beech Grove	76/01/19 74/10/16	76/11/09 76/11/09	0.2 0.2	0.2 0.4	0.1 0.0	10 25	.048 .082
***	Green R., Lock 1	70/09/15 66/07/22 59/10/10	72/08/16 72/08/16 72/08/16	.20 .20 .192	.50 .50 .50	.00 .00 .00	5 9 51	.187 .141 .084
-	STORET #00915	Calcium m	g/l No Std	•				
-	Green R., Greensburg	71/04/07 65/11/09 59/10/14	71/04/07 71/04/07 71/04/07	27.9 23.2	55.0 55.0	16.0 9.6	1 13 51	11.0 8.74
-	Green R., Munfordville	70/01/10 65/01/12 59/10/09	73/09/12 73/09/12 73/09/12	19.2 37.1 304.4 32	80.0 850.0 250.0	3.0 3.0 3.0	90 217 425 2	17.5 48.6 41.6
-	Barren R., Bowling Green	76/04/21 71/03/15 59/10/16	76/11/17 75/07/15 76/11/17	30.1	60.0 35.0 60.0	40.0 22.0 17.0	3 7 27	10.067 4.914 8.706
-	Pond R., nr. Sacramento	70/12/01 66/09/08 59/10/17	73/07/16 73/07/16 73/07/16	139.3 2 172.1 2	270.0 270.0 270.0	61.0 61.0 18.0		13.9 76.1 70.0
-								

Table F-10 Continued

	Beg. Date	End Date	Mean	Max	Min.	#0BS	S
STORET #01030	Chromium	micrograms/l	iter K	y. Std	. 50 ug/	1	
Green R., Greensburg	76/02/25 76/07/18	76/06/72 76/06/22	3.3 3.0	10.0 10.0	0.0	3 6	5.774 4.690
Barren R., Bowling Green	76/01/28 75/08/25	76/11/17 76/11/17	1.4 1.0	7.0 7.0	0.0	5 7	3.130 2.646
Pond R., nr. Apex	76/01/29 75/08/28	76/11/15 76/11/11	3.6 2.6	18.0 18.0	0.0	5 7	8.050 6.803
Green R., Beech Grove	76/04/06 74/10/16	76/08/05 76/08/05	0.0	0.0	0.0	2 7	0.000 0.488
STORET #01049	Lead micr	ograms/liter	Ky. S	td. 50	ug/l		
Green R., Greensburg	76/02/25 60/11/07	76/06/22 76/06/22	9.7 1.1	17.0 18.0	3.0 0.5	3 50	7.024 3.697
Green R., Munfordville	65/01/10 62/11/12	65/09/17 65/09/17	.00	.00	.00	9 29	.00
Barren R., Bowling Green	76/01/28 75/08/25	76/11/17 76/11/17	14.6 12.4	38.0 38.0	0.0	5 7	14.553 13.088
Pond R., Nr. Apex	76/01/29 75/08/28	76/11/15 76/11/15	12.2 9.6	42.0 42.0	0.0	5 7	16.947 14.650
Pond R., nr. Sacramento	62/10/31	64/08/05	.00	.00	.00	4	.00
Green R., Beech Grove	76/01/19 74/10/16	76/08/05 76/08/05	5.7 4.4	11.0 11.0	0.0 0.0	3 8	5.508 4.241
STORET #01000	Arsenic M	icrograms/li	ter Ky	. Std.	50 ug/l		
Green R., Greensburg	76/02/25 75/07/18	76/06/22 75/11/20	0.7 0.0	1.0	0.0 0.0	3 3	0.577 0.0
Green R., Munfordville	65/01/10 62/11/12	65/09/17 65/09/17	.00	.00	.00	9 29	.00
Barren R., Bowling Green	76/01/28 75/08/25	76/11/17 76/11/17	0.2 0.1	1.0	0.0	5 7	0.447 0.378
Pond R., nr. Apex	76/01/29 75/08/28	76/11/15 76/11/15	0.0	0.0	0.0	5 7	0.0 0.0
Pond R., nr. Sacramento	62/10/31	64/08/05	.00	.00	.00	4	.00

Table F-10 Continued

Station	Beg. Date	End Date	Mean	Max.	Min.	#OBS.	S
Green R., Beech Grove	76/04/06 74/10/16	76/08/05 76/08/05	1.0	1.0 1.0	1.0	2 7	0.000 0.535
Bacteriological Data							
STORET #31503 STORET #31616						Std 1000/	100 ml
Green River, Liberty Total Coliform	75/01/06 74/03/25	75/12/04 75/12/04	169 235	488 600	0 0	14 28	
Fecal Coliform	75/01/06 74/10/25	75/02/18 75/03/18	27 78	65 238	11 11	4 8	
Green R., Greensburg Total Coliform	74/03/19	74/12/16	606	1157	137	15	
Fecal Coliform	74/10/25	74/12/02	35	54	19	3	
Russell Crk.,Columbia Total Coliform	75/01/06 74/03/25	75/12/19 75/12/19	5220 356	50400 1053	97 0	20 29	
Fecal Coliform	75/01/06 74/10/25	75/02/18 75/02/18	39 95	104 321	4 4	4 9	
Green River, Munfordsville Total Coliform	75/01/08 74/04/16	75/12/18 75/12/18	182 382	800 2000	0	13 29	
Fecal Coliform	75/01/06 74/01/06	75/02/18 75/02/18	17 25	50 66	5 5	4 7	
Rough River	•						
Total Coliform	75/01/08 74/04/16	75/12/18 75/12/18	1335 1027	6550 6550	0 0	11 22	
Fecal Coliform	75/01/24	75/12/18	1558	3900	139	5	
	Green R., Beech Grove Bacteriological Data STORET #31503 STORET #31616 Green River, Liberty Total Coliform Fecal Coliform Fecal Coliform Russell Crk., Columbia Total Coliform Fecal Coliform Fecal Coliform Fecal Coliform Fecal Coliform Green River, Munfordsville Total Coliform Fecal Coliform Rough River Hartford Total Coliform	Green R., Beech Grove 76/04/06 74/10/16 Bacteriological Data STORET #31503 STORET #31616 Green River, Liberty Total Coliform 75/01/06 74/03/25 Fecal Coliform 75/01/06 74/10/25 Green R., Greensburg Total Coliform 74/03/19 Fecal Coliform 75/01/06 74/03/25 Fecal Coliform 75/01/06 74/04/16 Fecal Coliform 75/01/08 74/04/16 Rough River Hartford Total Coliform 75/01/08 74/04/16	Station Date Date Green R., Beech Grove 76/04/06 76/08/05 Bacteriological Data 76/04/10/16 76/08/05 STORET #31503 STORET #31616 Total Coliform colin Fecal Coliform colin Fecal Coliform Green River, Liberty Total Coliform 75/01/06 75/12/04 74/03/25 75/12/04 Fecal Coliform 75/01/06 75/02/18 74/10/25 75/03/18 Green R., Greensburg Total Coliform 74/03/19 74/12/16 Fecal Coliform 74/10/25 74/12/02 Russell Crk., Columbia Total Coliform 75/01/06 75/12/19 74/03/25 75/12/19 Fecal Coliform 75/01/06 75/02/18 75/02/18 Green River, Munfordsville Total Coliform 75/01/08 75/12/18 74/04/16 75/12/18 Fecal Coliform 75/01/08 75/02/18 74/01/06 75/02/18 Rough River Hartford Total Coliform 75/01/08 75/12/18 75/12/18 75/01/08 75/12/18 75/01/08 75/12/18 75/01/08 75/12/18 75/01/08 75/12/18	Station Date Date Mean	Station Date Date Mean Max.	Station Date Date Mean Max. Min.	Station Date Date Mean Max. Min. #0BS.

Table F-10 Continued

00110111000							
Station	Beg. Date	End Date	Mean	Max. I	Min.	#OBS.	S
Beaver Cr., Glasgow Total Coliform	75/01/06 74/03/25	75/12/04 75/12/04	210 228	484 700	0	13 15	
Fecal Coliform	75/01/06	75/05/12	5	126	0	3	
Barren River below Barren R. Reservoir							
Total Coliform	75/01/25 74/03/25	75/12/04 75/02/18	14 103	60 1333	0 0	12 25	
Fecal Coliform	75/01/25	75/02/18	24	1.26	0	6	
Drakes Cr., Frank!in WPI							
Total Coliform	75/01/07 74/04/15	75/12/17 75/12/17	1605 2 7 55	7800 19 7 00	98 0	11 21	
Fecal Coliform	75/10/22	75/11/25	1553	3033	73	2	
Barren R. Bowling Green WPI							
Total Coliform	75/01/07 74/04/15			800 13100	5 5	12 22	
Fecal Coliform	75/10/22		344			1	
Green R. Morgantown WPI							
Total Coliform	75/01/08 74/04/ 16			933 3600		12 23	
Green R., Central							
City WPI Total Coliform	75/01/08 74/05/14			4167 52000		12 20	
Fecal Coliform	75/07/22	75/12/18	511	1303	0	3	

Table F Continued

		Station	Beg. Date	End Date	Mean	Max.	Min.	#OBS	S
- wast	Green R.,	nr. Beech Grove	76/01/19 75/02/11	76/12/07 76/12/07	141.3 256.0	420.0 2200.0	18.0 18.0	12 23	110.918 445.201
-	Green R.,	Lock 1	71/04/27 66/07/22 59/10/10	71/04/27 71/04/27 71/04/27	51.0 44.2 39.7	52.0 65.0	27.0 20.0	1 5 56	10.2 10.1
_	STORET #00	925	Magnesium	ımg/l No S	Std.				
.	Green R.,	Greensburg	71/04/07 65/11/09 59/10/14	71/04/07 71/04/07 71/04/07	4.9 6.08 6.05		3.9 1.70	1 13 51	2.59 5.75
-	Green R.,	Munfordville	70/11/01 68/11/25 59/10/09	72/10/15 72/10/15 72/10/15	8.83 10.5 11.7	12.0 14.0 80.0	6.8 6.8 2.5	3 5 143	2.78 3.09 10.3
_	Barren R.,	Bowling Green	76/04/21 59/10/16	76/11/17 76/11/17	8.3 6.8	9.8 12.0	6.9 2.3	3 27	1.450 2.148
-	Pond R., n	r. Sacramento	70/12/01 66/09/08 59/10/17	73/07/16 73/07/16 73/07/16	63.7 97.3 44.6	130.0 158.0 158.0	22.0 22.0 5.8	3 7 38	58.1 48.5 40.2
-	Green R.,	nr. Beech Grove	76/01/19 74/10/16	76/11/09 76/11/09	9.6 9.3	16.0 17.0	6.8 4.2	10 25	2.561 2.048
-	Green R.,	Lock 1	71/04/27 66/07/22 59/10/10	71/04/27 71/04/27 71/04/27	12.0 11.9 9.2	16.0 18.0	6.3 3.5	1 5 56	3.51 3.35
***	STODET #01	025	Cadmium m	i anaguama	/1:+	No C#4	100	.a./1	
-	STORET #01 Green R.,		76/02/25 60/11/07	nicrograms, 76/06/22 76/06/22	4.7 0.3	7.0 7.0	2.0 0.0	3 50	2.517 1.287
	Green R., I	Munfordville	65/01/10 62/11/12	65/09/17 65/09/17	.00			9 29	
		Bowling Green	76/01/28 75/08/25	76/11/17 76/11/17	1.8 2.1	4.0 4.0	0.0	5 7	1.789 1.676
-	Pond R., ni	r. Apex	76/01/29 75/08/28	76/11/15 76/11/15	3.2 3.0	6.0 6.0	0.0 0.0	5 7	2.588
-	Pond R., r	nr. Sacremento	62/10/31	64/08/05	.00	i		1	

Table F Continued

Station	Beg. Date	End Date	Mean	Max.	Min.	#OBS	S
Green R., Beech Grove	76/01/19 74/10/16	76/08/05 76 / 08/05	2.7 1.6	3.0 4.0	2.0	3 8	0.577 1.598
STORET #01056	Manganese	e microgram	s/liter	Prop. Ky	/. Std.	50 ug/l	
Green R., Greensburg	72/07/20 59/10/14	72/08/24 72/08/24	74.0 158.9	87.0 410.0	61.0	2 11	18.4 134.2
Barren R., Bowling Green	71/12/29 59/10/16	72/07/25 72/07/25	61.2 301.9	96.0 2400.0	29.0 .00	4 13	28.2 641.1
Pond R., nr. Apex	61/10/05	61/10/05	330.0			1	
Pond R., nr. Sacramento	71/11/18	73/07/16	8839.9				
Green R., Beech Grove	76/01/19 74/10/16	76/08/05 76/08/05	160.0 168.8	190.0 380.0	140.0 10.0	3 8	26.458 120.646
Green R., Lock 1	72/05/09	72/05/09	180.0			1	
STORET #01046	Iron mici	rograms/lit	er, Prop	EPA St	d. 300 u	ıg/l	
Green R. Greensburg	72/07/20 59/10/14	72/08/24 72/08/24	125.0 240.0	150.0 1100.0	100.0	2 14	35.4 266.4
Green R., Munfordville	65/01/02	66/09/24	54.0	330.0	.00	15	84.2
Barren R., Bowling Green	71/12/29 59/10/16	72/07/25 72/07/25	100.0 288.6	200.0 2400.0		4 14	95.2 611.9
Pond R. nr. Apex	61/10/05	61/10/05	190.0			1	
Pond R., nr. Sacramento	71/11/18 59/10/17	73/07/16 73/07/16	1202.0 1076.4	2200.0 3200.0		5 25	745.8 874.5
Green R., Beech Grove	76/01/19 74/10/16	76/08/05 76/08/05	70.0 40.0	140.0 140.0	30.0 0.0	3 8	60.828 44.72 1
Green R., Lock 1	72/05/09	72/05/09	370.0			1	

Table F -11

Organic Loads Affecting Streams in the Green River Basin

organic loads are discharged	ea		1,670
Stream length for which dissolve oxygen is predicted to be below 5 mg/l during periods of low flow with present treatment	d		214
Stream length for which dissolve oxygen is predicted to be below 5 mg/l during periods of low flo			
due to with present treatment	Municipal Industrial	Discharges Discharges Discharges	173 6.8 34.5

NOTE: This information is from the waste load allocation for Kentucky and is an output from the 303e river basin planning effort. The values indicate the stream miles in which the dissolved oxygen is predicted to be less than 5 mg/l when the stream flow is less than the once in ten year seven day (Q 10-7) low flow.

 $\label{thm:continuous} Table \ F-12$ Water Usage for Industry and the Public in the Green River Basin

			Surface		und
County	City	Public	Industrial	Public	Industrial
Adair	Columbia	267,000	2,700		
Allen	Scottsville			456,000	114,000
Barren	Glasgow Res. Glasgow Creek Park City	867,000 1,300,000	229,000	40,000	
Breckinridge	Kingswood			15,000	
Butler	Morgantown Rochester	180,000 27,700	300		
Casey	Liberty	116,000	38,800		
Christian					
Daviess	Whitesville			40,400	
Edmonson	Bee Spring Edmonson C.W.D.	265,000		1,360	
	Brownsville Mammoth Cave	203,000		60,100 73,600	
Grayson	Caneyville Leitchfield	22,300	500	279,000	45,400
Green	Gabe Greensburg Nally Gibson	3,500 172,000	172,000 43,000 24,000		
Hancock					
Hardin	Elizabethtown Upton			1,630,000 45,000	16,400 5,000
Hart	Horse Cave Munfordsville	82,100	11,200	525,000	45,700
Henderson	Anaconda Alum.		639,000		

Table F-12 Continued

Russell

		Surface		ırface	Ground		
	County	City	Public	Industrial	Public	Industrial	
-	Hopkins	Earlington Madisonville Nortonville White Plains	148,000 1,790,000	268,000	75,600 17,100	3 , 900 900	
•		Cinmarron Coal Island Creek Coal		288,000 39,800	,,,,,,	300	
-	Larue	Hodgenville Auburn Dyeing Auburn	190,000	12,700	93,200	23,200	
-		Caldwell Lace Lewisburg Russellville	43,300 436,000	25,700 4,800 387,000	16,900	14,900	
-	McLean	Calhoun Livermore Sacramento	133,000 128,000	133,000 14,200	19,750		
-	Metcalfe	Edmonton	48,800	5,400			
7888	Monroe	Gamaliel Res and Creek	49,000				
		Tompkinsville	125,000	75,000			
-	Muhlenberg	Central City Gilbrater Coal Pittsburg Midway	713,000	75,000 1,520,000 164,000	100,000	1 000	
-		Drakesboro Graham Greenville	17,100 323,000	175 17,000	102,000	1,000	
**		Kirkpatrick Mine Wright Coal (Madisonville)	,	35,000 79,400			
-		Peabody Coal (Beaver Dam)		739,000			
_	Ohio	Peabody Coal Fordsville	48,000	469,000			
		Hartford Ohio C.W.D. Rockport	227,000 310,000 60,400	12,000 77,500			
-		Peabody Coal (Hartford)	30,100	288,000			
-		Peabody Coal		590,000			
	Pulaski						

Table F-12 Continued

		Sur	Surface		ınd
County	City	Public	Industrial	Public	Industrial
Simpson	Franklin	709,000	382,000		
Taylor	Campbellsville Res. and Creek	600,000	900,000		
	Tennessee Gas Piping		183,000	4,000	
Todd					
Warren	Bowling Green Beech Bend Warren C.W.D. Pet Milk	5,230,000	922,000	10,000 131,000	460,000
	Smiths Grove			55,000	600
Webster	Dixon Sebree Texas Gas	65,000		76,000	1,000
	(Slaughters) Slaughters	44,000			44,500
		14,700,000	9,800,000	3,770,000	777,000

Source: Kentucky Department for Natural Resources and Environmental Protection Division of Water Resources